




Altair Square 8412C/WR35VO

Ceiling Lamps - Ceiling luminaire L. 280 Diffuse Emission

Rev. 20/03/2024



Ceiling light for wall- or ceiling-mounted installation, available in two sizes with white opal diffuser for greater uniformity of the luminous flux. Independent wall-mounting bracket.

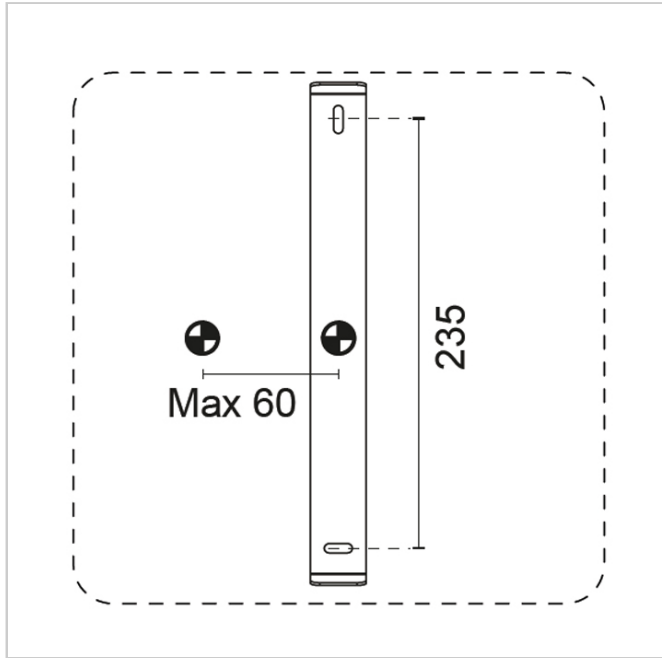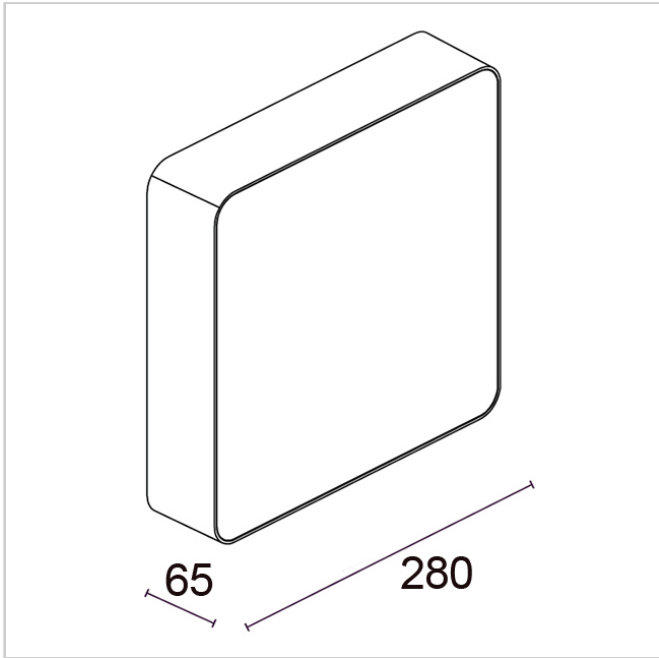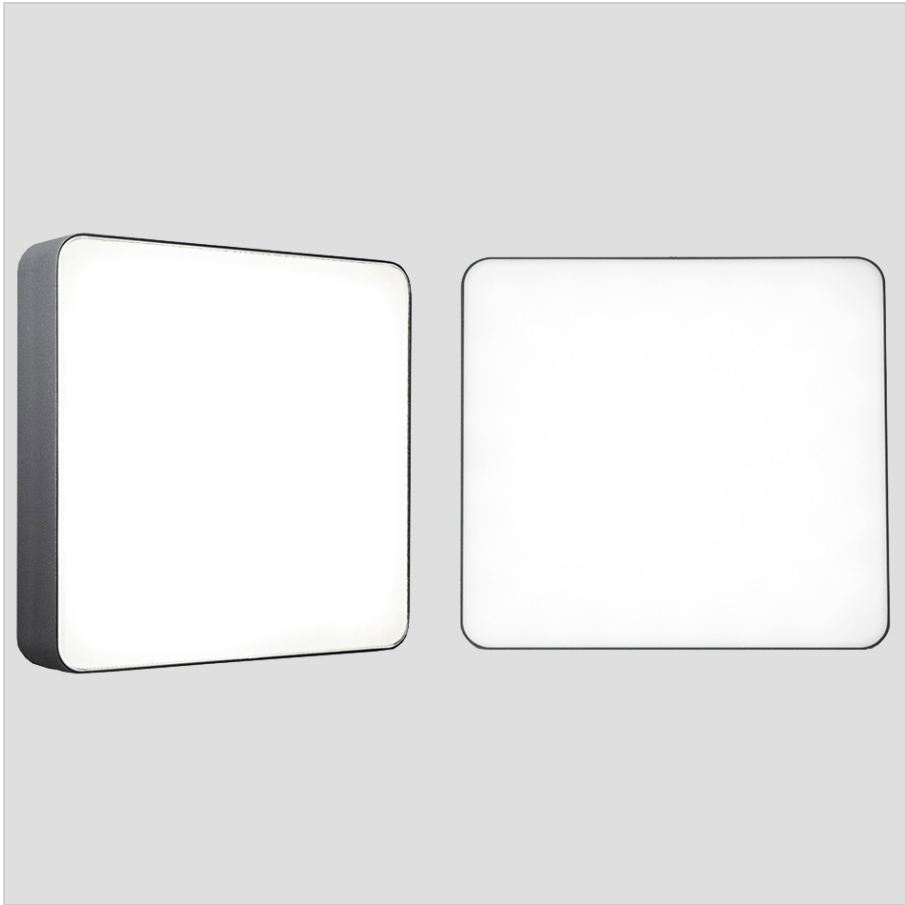

PHOTOMETRICAL DATA



FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE Wall fixing and ceiling installation	FRAME Die-cast aluminium	SCREWS Stainless steel A2
PROTECTION IP 65 - IK 07	SCREEN Extra-clear float glass 4mm with white diffusing silk-screen printing	PAINT / FINISHING Anti-corrosive UV stabilised polyester powder
BODY Die-cast aluminium	SEALS Closed-cell EPDM rubber	SIZES H 280 x L 280 x W 65

ELECTRICAL SPECIFICATIONS


POWER SUPPLY 220-240Vac 50/60Hz	DRIVER
---	---------------

Built-in	SOURCE FLUX 2330 lm	CCT LED 3000K
DRIVER CURRENT 500mA	FIXTURE SOURCE 1150 lm	CRI >80
CONTROL ON/OFF	APPARENT EFFICIENCY 49 %	STEP MACADAM 3
SPECIFIC WIRING Inclusa/Included	INSULATION CLASS II	LIFE TIME TM-21 L80B10 50000h
POWER MODULE LED 20W	OVERVOLTAGE PROTECTION 2kV-4kV	PHOTOBIOLOGICAL RISK RG0
ABSORBED POWER 22W	OPERATING TA 50 °	BEAM OPENING Diffuse >110°
SOURCE LED	ENERGETIC CLASS A	

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES



E.TRA.580 Ultra compact type 2+3 hard wired surge protector. CLI - IP67. Disconnection signaling by indicator. AC disconnection in case of end of life.

L 37 x W 30 x H 30